

# CAPXL CONNECTED ACCESS PORTAL, HIGH CAPACITY

Cloud-based access control for residential communities.



## KEY FEATURES

**LIFTMASTER CLOUD™**  
Smart Access Control Software

**COLOR TOUCH DISPLAY**  
10", 720p High-Def Interface

**PLUG AND PLAY**  
Easy Setup and Programming

## SMART

**INTUITIVE INTERFACE** WITH COLOR TOUCH DISPLAY FOR SUPERIOR RESIDENT AND GUEST USABILITY.

**CUSTOMIZABLE BACKGROUND** ON A 10", FULL-COLOR, 720p HIGH-DEFINITION SCREEN.

**REMOTE PROGRAMMING** AND ACTIVITY MONITORING USING LIFTMASTER CLOUD.

**CONFIGURABLE EMAIL NOTIFICATIONS** KNOW WHEN CODES ARE OVERUSED OR IF SERVICE IS NEEDED FOR THE CAPXL, CAP2D OR GATE OPERATOR.

**ELIMINATE TRENCHING** WITH WI-FI® AND WIRELESS LINK TO LIFTMASTER® GATE OPERATORS.

## RELIABLE

**VOICE OVER IP (VoIP)** PROVIDES CRYSTAL-CLEAR CALL QUALITY WITH NO LONG-DISTANCE CHARGES.

**STAINLESS STEEL** FOR A MODERN, DURABLE DESIGN.

**LOCAL SYSTEM MEMORY** ALLOWS RESIDENTS TO ENTER EVEN WHEN THE INTERNET IS DOWN.

## SECURE

**GET ALERTED** WHEN A SUSPENDED CODE IS USED OR IF AN ACTIVE CODE IS BEING OVERUSED.

**REAL-TIME ACTIVITY TRACKING** WITH LIFTMASTER CLOUD.

**CLOUD-BASED SECURITY** KEEPS DATA PROTECTED AND SAFEGUARDS RESIDENT INFORMATION.

## TOTAL SOLUTION ACCESSORIES:

### CONNECTED ACCESS PORTAL, 2-DOOR CONTROLLER

Cloud-based, credentialed access control.



CAP2D

### CELLULAR 4G/LTE MODEM WITH WI-FI

Makes it easy to connect CAPXL and CAP2D(s) anywhere.



CAPCELL

### TRIM KIT AND BACK KIT

Conceal openings left from other systems in flush-mount, infinity L and icon installations.



CAPXLTK

### PASSPORT REMOTE CONTROLS

PPV3M/PPK3PHM/PPLK1-X

Visor and keychain remotes with unique credentialed IDs.



CAP2D

### multiCLASS® SE RP10 MINI MULLION

Proximity reader for credentialed access.



LMMC-MINI

### PROXCARD II® 1326 CLAMSHELL CARD

Proximity card for credentialed access.



LMPG2-ST

### ELEVATOR ACCESS CONTROL

CAPB485/CAPDC485/CAPRELAY

Integrated elevator access and control.



CAP485

### ANTENNA MOUNTING KIT

For extended range or remote mounting for radios or Wi-Fi.



86LM/WIFAEXT

### GATE OPERATORS

CSW24U/CSL24U/HCTDCU

Ensure quick and safe access for residential communities. Pair with CAPXL for remote system diagnostics.



# MASTERFUL ENGINEERING.

**CAPXL**

CONNECTED ACCESS PORTAL,  
HIGH CAPACITY

## CAPACITIES



- 4 Controlled Gates/Doors
- Wireless Link for up to 8 LiftMaster® Operators
- 4 to 8 Digit Entry Codes
- 4 to 6 Digit Directory Codes
- 50,000 Local Resident Capacity
- 50,000 Local Event History
- Multiple, Holiday and Hold-Open Scheduling, Including One-Time and Repeating Exceptions

## POWER



- Input 120V AC (Transformer Included)
- UL® Listed
- Relay Outputs 3 Amps

## DIMENSIONS



- CAPXL: 18" x 14" x 4.5"
- CAPXLTK (Outer Trim): 23.75" x 19.375"

18"



14"

4.5"

## MECHANICS



- 10", 720p High-Definition Touch Display
- Fade- and Glare-Resistant Display
- Outdoor Stainless-Steel Housing
- Built-In Security+ 2.0® Radio
- Postal Lock Provision
- Surface, Flush (CAPXLTK) or Pedestal (PED42, PED64) Mount
- Camera Ready; Use Any Standard Pinhole Camera




LiftMaster Cloud™

Have more entrances?  
Add more CAPXLs or CAP2Ds  
to meet the needs of  
any community.

CAPCELL or  
Modem/Router

Readers

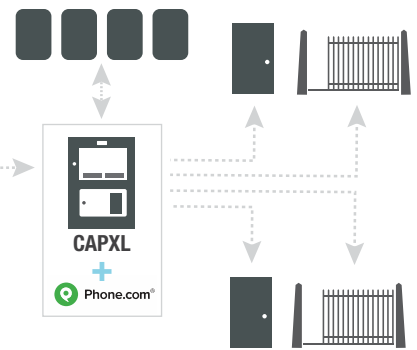

LiftMaster Cloud subscription required.

# STANDARD SPECS.

ELECTRICAL

## COMMUNICATION

### INTERNET (DYNAMIC OR STATIC IP)

- Wi-Fi®
- High Speed
- DSL with at Least 1 MB Download Speed
- Cellular (Optional CAPCELL)

## VOICE

- VoIP (Voice over IP)
- Phone.com® Service Required for VoIP

## ONBOARD RADIO

- Security+ 2.0 for Passport Remote Controls
- Wireless Link to UL 325 Gate Operators Manufactured After October 2017
- Retrofit Kits Will Be Available for Operators Manufactured Between January 2016 and October 2017
- HomeLink® IV and V Compatible\*

\*Requires HOA or Management Assistance

## WARRANTY

- 2-Year

## INPUT PORTS

- 4 Wiegand Inputs
- 4 Request-to-Exit (REX) Inputs
- 4 Supervised Inputs
- 1 Auto-Call Input (Requires LPEXP)

## OUTPUTS

- 4 Primary Relays
- 4 Auxiliary Relays
- 1 Wiegand Output

OPERATING TEMPERATURE **-20°F to 130°F**  
(-29°C to 54°C)

# SHIPPING.

## SHIPPING WEIGHT (in lbs.)

24

## CARTON (1)

- 23" x 18" x 9"
- CAPXL
- 24V DC Power Supply
- 2 Keys
- Radio Antenna
- Wi-Fi Antenna
- Misc. Hardware

For Support Tools and Training Videos, Visit  
[LiftMasterTraining.com](http://LiftMasterTraining.com)

For More Information, Visit  
[LiftMaster.com/AccessControl](http://LiftMaster.com/AccessControl)

Sales Support: **800.282.6225**  
Technical Support Center: **800.528.2806**  
[LiftMasterDealer.CustHelp.com/App/Ask](http://LiftMasterDealer.CustHelp.com/App/Ask)